

APPLICATION AREAS

Fitness Hall Surfaces,
Other indoor and
outdoor sports
fields

SYSTEM DESCRIPTION

"Anymats Rr - Roll Rubber (Black)" is made of Recycled SBR and Original EPDM granules by mixing it with special polyurethane adhesive, and it is produced by press method in suitable temperature and pressure molds, then it is cut in desired thickness and length.

FEATURES

Due to its special texture on the surface, it minimizes slippage and ensures safe and comfortable sporting activity.

ANYMATS RR ROLL RUBBER (BLACK)

TECHNICAL INFORMATION

3 MM	SBR ROLL	1,20 MT	10 MT (appr.)	2,88 KG/m ²
4 MM	SBR ROLL	1,20 MT	10 MT (appr.)	3,84 KG/m ²
5 MM	SBR ROLL	1,20 MT	10 MT (appr.)	4,80 KG/m ²
6 MM	SBR ROLL	1,20 MT	10 MT (appr.)	5,76 KG/m ²
7 MM	SBR ROLL	1,20 MT	10 MT (appr.)	6,72 KG/m ²
8 MM	SBR ROLL	1,20 MT	10 MT (appr.)	7,68 KG/m ²
9 MM	SBR ROLL	1,20 MT	10 MT (appr.)	8,64 KG/m ²
10 MM	SBR ROLL	1,20 MT	10 MT (appr.)	9,60 KG/m ²

TECHNICAL VALUES

Material	Made from SBR granule and special PU binding chemicals.
Density	960 kg / m ³
Hardness	70 Shore
Resistance to heat	- 40° C to 115° C
Tensile Strength	8,68 kgf / cm ²
Elongation	46,66 %

INSTALLATION METHOD

PU Glue	Double component glue is mixed. Approximately 1.00 KG / m ² is applied with a treaded trowel between 30-40 minutes
Modular Rubber	The modular rubbers are lined up side by side at desired pattern so that there is no gap, and the edges are firmly glued by using weight if necessary.

COLORS

Glue	Red, Green
Modular Rubber	Red, Green, Mix, Black

ADVANTAGES

Fast	Roller rubbers can be applied in a very practical way as they are produced in the factory environment.
No Machine Needed	No machine is needed for the installation.
Durable	The abrasion resistance is very high due to both the production method and the binder polymers in it.

PRODUCT PACKAGING

PU Glue	10 KG (9+1) or 24 KG (21+3) plastic/metal buckets.
Rubber Roll	It is properly stacked on the pallets. Protected by plastic packaging.

PRODUCT STORAGE

PU Glue	Unopened packages can be stored between +5 and +30 degrees for 12 months.
Rubber Roll	Unopened packages can be stored between +5 and +30 degrees for 24 months.

PRODUCTION AND INSTALLATION PERIODS


PU Glue	Production: 1-5 Days	Installation: 1-5 Days	Can not work simultaneously
Rubber Roll	Production: 3-10 Days	Installation: 1-5 Days	Can not work simultaneously

WARRANTY PERIODS

UV	5 YEARS	% 5 Tolerance
Granule Abrasion	3 YEARS	%10 Tolerance
Installation Warranty	1 YEAR	

ANYMATS RR ROLL RUBBER (BLACK)

EXAMPLES OF APPLICATIONS

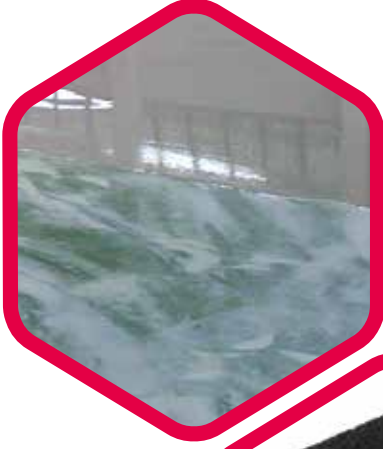

anymats®
Roll Rubber Floors